


# SWEL-PLUG

for pressure testing of open pipes



- 0-3000 PSI Standard, up to max 6000 PSI special request.
- Applications: Hose, Glass fiber, Plast, Titan, 6MO, Stainless, Carbon pipes.
- Testmedia; Gas or liquid. Manual installation. No inflation or bolting. Can be used on subsea pipelines.
- Sizes from 3/4" - 24" standard. Available bigger sizes
- On part only, no need for spare parts.
- Each plug covers a wide ranges of schedules.
- Eliminates us of end caps. (Weld Caps).
- Can be used as flange tester, piglaunchers.
- Long lifetime.



Tabell show min/max coverage for each plug


Nom Pipe	Part 4031			Part 4032			Part 4033			
	Size	Min/ID	Lengde	Max/ID	Min/ID	Lengde	Max/ID	Min/ID	Lengde	Max/ID
3/4"	N/A		N/A	18,85	92	20,96				
1"	26,70	111	29,54	24,13	111	26,7	20,96	111	24,13	
1 1/4"	35,2	111	37,97	32,39	111	35,2	29,54	111	32,39	
1 1/2"	41,17	124	44,75	37,97	124	41,17	-	124		
2"	52,52	141	55,65	48,56	141	52,52	44,75	141	48,46	
2 1/2"	63,24	176	68,07	58,95	176	63,24	55,65	176	58,95	
3"	77,97	206	83,15	72,97	206	77,95	68,07	206	72,97	
3 1/2"	90,14	231	94,76	83,15	231	90,14				
4"	103	257	111,3	94,76	257	103				
5"	128,3	308	135,3	119,6	308	188,2	111,3	308	119,5	
6"	154,9	330	166,6	143,2	330	154,9	135,3	330	143,3	
8"	203,6	431	217,1	190,1	431	203,6	178,4	431	190,1	
10"	256,7	504	269,4	244	504	256,7	230,6	504	244	
12"	305,4	611	316	294,8	611	305,4	282,1	611	294,8	
14"	343,5	688	360,5	328,3	688	343,5	316	688	328,3	
16"	394,3	768	411,3	379,4	768	394,3	360,5	768	377,4	
18"	445,1	871	462,1	428,2	871	445,1	411,3	871	428,2	
20"	496	935	512,9	479	935	496	462,1	935	479	
22"	546,7	1066	563,7	529,8	1066	546,7	512,9	1066	529,8	
24"	597,5	1088	614,5	580,6	1088	597,5	563,7	1088	580,6	

All sizes have a center coupling NPT 3/8" to 2".

From 6" and upwards all plugs have vent/drain from 1/4" to 1/2" NPT

When use in glass fiber/plastic/rubber pipe, a steel sleeve should be slid over the outside pipe, to avoid damage.

**Materiale:** Coupling-A105, Cap-A234 WPB, PVC temperature Max 70 °C

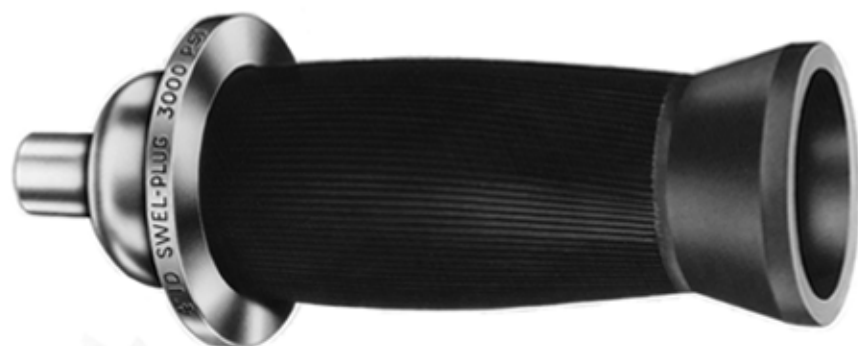

**Referance:** Has been on the market for over 20 years



For more information:  
ITAS, Postbox 739, 4090 Hafslund  
Phone: 51552104, Telefax: 51550600  
Mail: itas@itas-no.com  
Web: www.itas-no.com